
CERTIFICATE

Certified Passive House Component Component-ID 1042sr03 valid until 31st December 2022 Passive House Institute Dr.Wolfgang Feist 64283 Darmstadt Germany

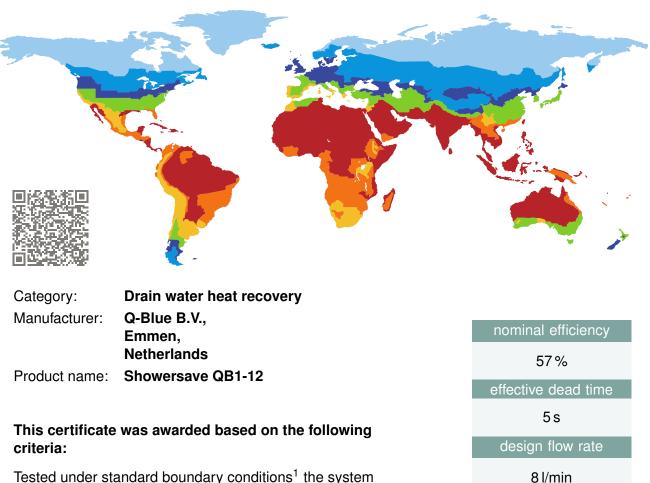

phA

Tested under standard boundary conditions¹ the system reduces the useful energy demand for shower by

$$47\% \ge 30\%$$

Further properties

www.passivehouse.com

Pressure drop tap water at 8 l/min:	0.21 bar
Connection tap water:	1/2" IG
Connection waste water:	DN 50

¹Balanced flow rates, cold water temperature 10 °C, Temperature at shower head 40 °C, waste water temperature 35 °C, negligible pipe length, shower time 6 min, flow rate 8 l/min

 Passive House
 phE
 phD
 phC
 phB



